

AMAX



torquing

**STRENGTH
UNDER PRESSURE**

AMAX HYDRAULIC PUMPS

AMAX



PNEUMATIC HYDRAULIC TORQUE WRENCH PUMP THREE-STAGE PERFORMANCE

GET RELIABLE PORTABLE PERFORMANCE FROM A HEAVY DUTY HYDRAULIC TORQUE WRENCH PUMP. SET THE PRESSURE AND ACHIEVE THE TORQUE EVERY CYCLE.

TECHNICAL DATA

Reservoir Capacity (gal/litre)
Valve Style
Air Motor Specification
Minimum Air Requirement
Weight (lbs/kg)

AMAX

2.2 / 8.4
Auto Retract
4 HP / 2.9kW
55 psi @ 35 CFM
60 / 27

MAX OIL FLOW

Stage 1 (1000psi / 70bar)
Stage 2 (4200psi / 300bar)
Stage 3 (10,000psi / 700bar)

AMAX

610 cu.in / min	10.0 l / min
145 cu.in / min	2.4 l / min
70 cu.in / min	1.1 l / min



DIMENSIONS

Length (in/mm)
Width (in/mm)
Height (in/mm)

AMAX



16.8 / 427
14.1 / 358
17.6 / 447

RESERVOIR DIMENSIONS


Length (in/mm)
Width (in/mm)
Height (in/mm)

AMAX

12.6 / 320
9.4 / 239
5.1 / 130

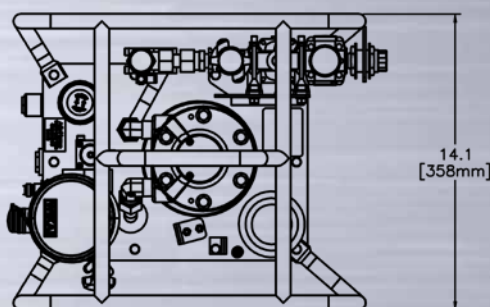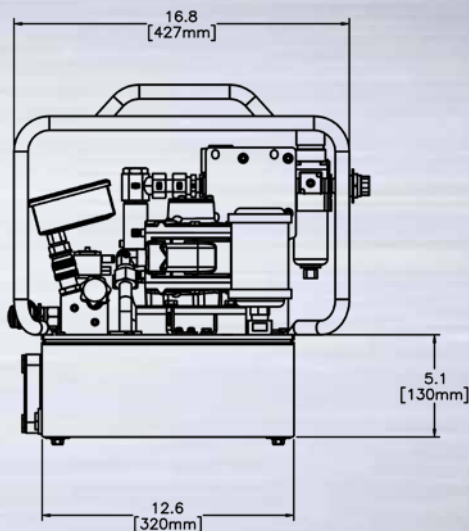

*All AMAX pumps fitted with an oil cooler & 15' pendant

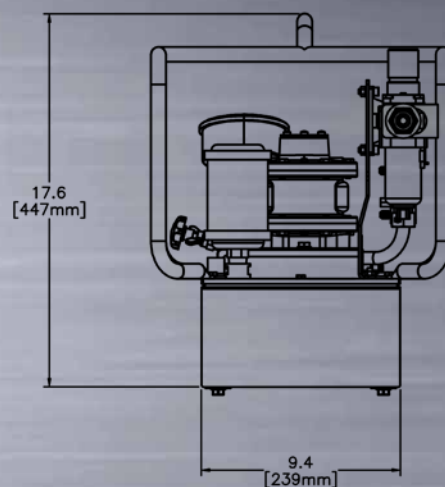

TWIN LINE
HYDRAULIC HOSE

MULTI- PORT
MANIFOLD



* HYDRAULIC HOSE AND MULTI- PORT MANIFOLD SOLD SEPARATELY
TorcUP Inc. 1025 Conroy Place Easton, PA. 18040 USA 1-888-TorcUP-1 +1 610-250-5800